



Features

- 15" TFT LCD (LED Backlight) with PCAP Touch
- Built in Intel J1900
- Stylish design with dual hinge, thinner boarder, slim screen
- Clear Cable Management
- Low power & fanless operation without heat ventilation holes
- Easy access to key components
- Easy peripheral mount design integrated
- Device Options: 2nd Display, MSR, VFD, RFID, Barcode Scanner



• Feature Points •

- | | |
|--|---|
| <input checked="" type="checkbox"/> IP 65 sealed front panel with touch design | <input checked="" type="checkbox"/> Bezel free & PCAP Touch Screen |
| <input checked="" type="checkbox"/> OS versatility(android ,Windows, linux compatible) | <input checked="" type="checkbox"/> True Vent free machine |
| <input checked="" type="checkbox"/> Soda lime glass with 7H hardness | <input checked="" type="checkbox"/> table top/wall mount stand/kit
(which is aluminium body) acts as Heat sink |

Highlights



Foldable design with dual hinge




Toughened Sodalime Glass




Wall Mount, via VESA mount kit



1xUSB port on backside w/ rubber cover
Screwed bracket design for USB port to ensure data security (Optional)

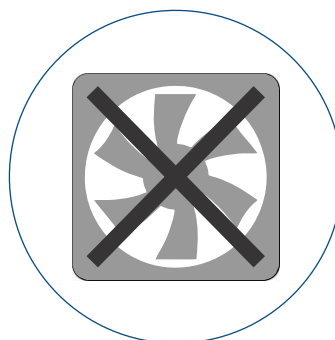

Fanless design

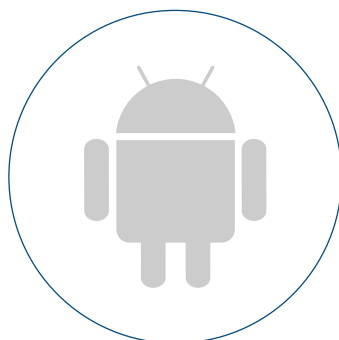

Android


Toll Free Number
1800 212 4520
For Support & Service

Specifications

Model	R-UPOS-211V
Processor	Intel Bay Trail Quad Core J1900, 2GHz up to 2.42GHz
Memory	Up to 8GB DDR3L-1333
Storage	1 x 2.5" SATA HDD/SSD connector, SATA2 (3.0Gb/S)
Panel	15" TFT LCD Display (1024 x 768), 250 cd/m ²
Touch Screen	15", Analog Resistive 5-wires (Res. Flat Glass) / Projected Capacitive Touch Panel (PCAP. Flat Glass) Light Transmission: Res. Touch 80% +/-5% / Pcap Touch 85% +/-3%
Bus Expansion	1 x Mini PCIe (for Wi for 3G), shared with mini SATA connector
Audio	1 x 2W speaker installed. 1 x Line out & 1 x Mic in (Optional)
Power Supply	60W power adapter
Serial Port	2 x COM RS232 ports on I/O board via RJ-48 connector, COM1 / COM2 support 5V & 12V by order Internal: 4 x COM port, COM3 for 5W Res. touch, COM4, COM5 support 5V & 12V by order, COM6 no power
USB Port	External: 2 x USB2.0; 1 x USB3.0; Internal: 3 x USB2.0 (1x USB for PCAP touch)
Ethernet	LAN controller: Realtek RTL8111G-CG, 1x RJ-45 Gigabit Ethernet
Display Output	1 x VGA, 1 x DP
Cash Drawer	1 x RJ11, cash drawer, 12V default, 24V by order
PS2	1 x PS2 (optional)
Parallel Port	1 x LPT (optional)
IP65	IP65 front panel protection
Dimension (W x H)	354(W) x 327(H) x 237(D)mm, Stand: 237 x 200 mm
Weight	5.2KG (Net weight) / 6.9KG (Gross weight)
Operating Temp.	0 ~ 40° C
Relative Humidity	10 ~ 90% @ 40° C
Shock	10G peak acceleration (11ms duration)
Vibration	5~500Hz 0.5Grms, random
EMC / Safety	CE, CCC, UL, FCC, CB/LVD, VCCI, BSMI
OS Support	POSReady 7, Windows 7 Pro, Windows 8.1 Pro (64-bit), Windows 10 IoT Enterprise, Linux Kernel 3.13 or above Android 4.4 (R-UPOS-211V supports Android)

Dimensions

Unit: mm

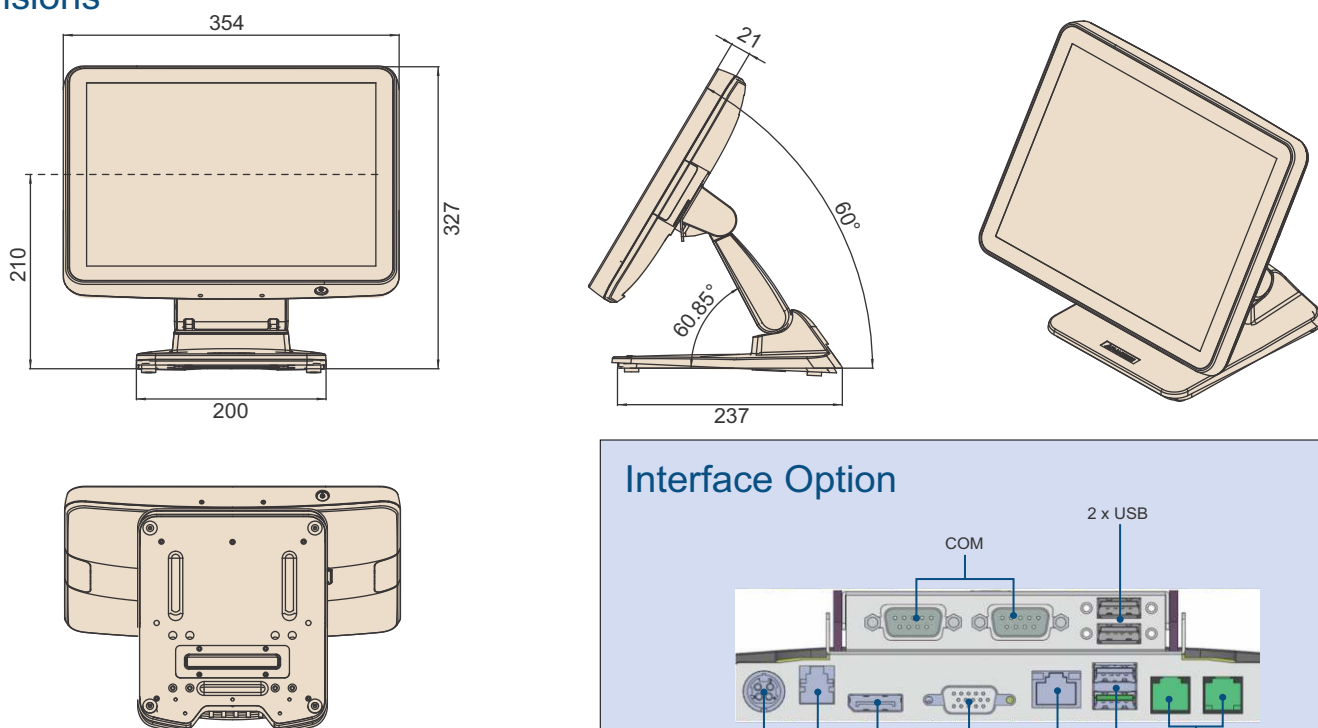

All product specifications are subject to change without notice, * identify as optional function



RAISERPOS

406- Business Classic Building
Chincholi Bandar Phatak
Near Kalpataru Plaza, SV Road
Malad (WEST) Mumbai - 400064

raiserpos.in

Toll Free Number
1800 212 4520

For Support & Service

For Sales inquiry: 9920080420
info@raiserpos.in/service@raiserpos.in

